

R&S®SFC

Compact Modulator

Test signals for TV and audio broadcasting – compact and cost-effective

The R&S®SFC compact modulator is an economical multistandard signal source offering realtime coding for all established digital and analog TV and audio broadcasting standards.



At a glance

The R&S®SFC compact modulator is a multistandard signal source that provides realtime support for all established digital and analog TV and audio broadcasting standards.

The 1 HU, 1/2 19" instrument is extremely compact and therefore ideal for rack installation in production test systems. Though small in size, the modulator is a full-featured signal generator with integrated transport stream player, audio/video generator and optional noise source, making it very useful for simple applications in development. The R&S®SFC is controlled using a USB mouse, keyboard and monitor, or via LAN using Remote Desktop. It has the same, well-known graphical user interface as the R&S®SFU and R&S®SFE. Remote control via SCPI commands is also possible.

Highlights

- Highly accurate modulator, with a MER > 40 dB (typ.)
- VHF and UHF frequency range, optionally up to 3 GHz
- Level range from 0 dBm to -31.5 dBm, optionally to -110 dBm
- Transport stream player and audio/video generator
- AWGN generator

Key features

Multistandard signal generator with realtime coding

- Digital and analog standards for cable, satellite and terrestrial TV
- Digital and analog audio broadcasting standards
- Realtime signal generation and coding
- Additional standards available as software options

Integrated baseband signal sources

- Transport stream player
- Transport stream libraries for digital TV standards
- Analog audio/video generator
- Test pattern library for analog TV

Simple and convenient remote operation


- Local operation using USB mouse, keyboard and monitor
- Remote control and remote operation via LAN

Optimized for use in production test systems

- Extremely compact housing, ideal for rack installation
- Low power consumption for reduced operating costs
- Compatible with Rohde&Schwarz system control software
- Standalone operation without PC possible

Additional functions for professional applications

- Integrated AWGN generator
- ASI transport stream input
- Digital I/Q input
- 10 MHz reference input

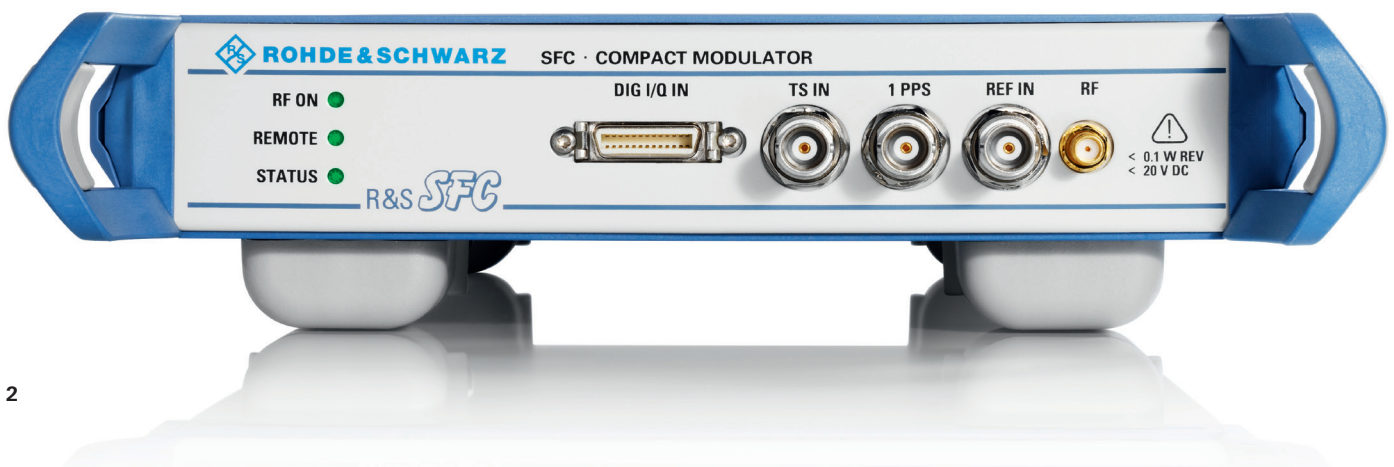

Specifications in brief

Specifications in brief		
RF characteristics		
Frequency range	R&S®SFC base unit	30 MHz to 900 MHz
	with R&S®SFC-K83 option	30 MHz to 3000 MHz
Frequency setting resolution		1 Hz
Level setting range	R&S®SFC base unit	–31.5 dBm to 0 dBm RMS for DVB-T
	with R&S®SFC-K84 option	–110 dBm to 0 dBm RMS for DVB-T
Modulation systems		
Terrestrial TV and mobile TV		DVB-T2
		DVB-T, DVB-H
		DTMB
		CMMB
		T-DMB
		ISDB-T, ISDB-T _{BS} , ISDB-T 1 seg.
		ATSC/8VSB, ATSC-M/H
		MediaFLO™
Cable TV		DVB-C2
		DVB-C, ISDB-C
		J.83/B
Satellite TV		DVB-S2
		DVB-S
		DIRECTV
Analog TV		B/G, D/K, I, M/N, L
Digital audio broadcasting		DAB, DAB+
		ISDB-T _{SB}
Analog audio broadcasting		AM, FM mono, FM stereo with RDS
Additional functionality		
Transport stream player	file format	TRP, T10, ETI, FLO, MFS, PMS, BIN
Audio/video generator	file format	Rohde&Schwarz proprietary
AWGN	signal-to-noise ratio (SNR)	–30 dB to +60 dB
General data		
Operating temperature range		+5°C to +45°C
Dimensions	W × H × D (without handles)	229 mm × 54.4 mm × 406 mm (9.02 in × 2.14 in × 15.98 in)
Weight		4 kg (8.82 lb)

Ordering information

Designation	Type	Order No.
Compact Modulator	R&S®SFC	2115.3510.02
Extensions		
Frequency Extension, 30 MHz to 3 GHz	R&S®SFC-K83	2115.5759.02
Electronic Attenuator, 0 dB to 110 dB	R&S®SFC-K84	2115.5736.02
Coder Extension Board	R&S®SFC-B15	2115.5836.02
Modulation systems		
Coder options and signal libraries	Please contact your local Rohde&Schwarz sales office.	

For data sheet, see PD 5214.5910.22 and www.rohde-schwarz.com

Service you can rely on

- Worldwide
- Local and personalized
- Customized and flexible
- Uncompromising quality
- Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- Energy-efficient products
- Continuous improvement in environmental sustainability
- ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- Europe, Africa, Middle East
+49 89 4129 123 45
customersupport@rohde-schwarz.com
- North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (bb)
PD 5214.5910.32 | Version 01.00 | June 2011 | R&S®SFC
Data without tolerance limits is not binding | Subject to change
© 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214591032